

THE PLATINUM PACKAGING GROUP

PLATWRAP CX(P)

DESCRIPTION :

PlatWrap CX(P) is a bi-axially oriented polyester (BOPET) film with one side corona treated, other side heat sealable


FEATURES AND APPLICATIONS :

- * One side corona treated
- * Superior gloss and clarity
- * Permanent heat sealable to itself, APET, CPET, PETG & PVC

AVAILABLE GAUGE(S) (MM) : 0.80, 0.92

PlatWrap CX(P) needs to be stocked in a closed warehouse and preserved from the light.

Platinum will not accept any responsibility for material older than 1 year from the delivery

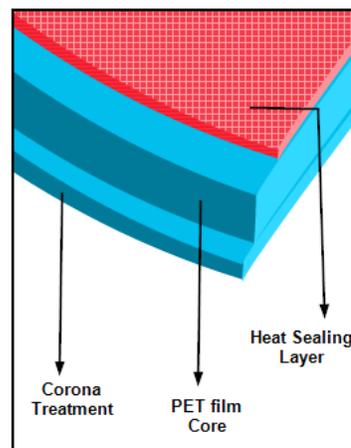

Properties	Unit		Technical Values	Test Method
Thickness	mil		0.80	ASTM D 2673
Yield	Sq. in./lb.		25107	ASTM D 2673
Haze	%		=< 5	ASTM D 1003
Dimensional stability	%	MD	=< 1,5	ASTM D 1204
	%	TD	=< 1	
Tensile strength at break	psi	MD	32714	ASTM D 882
	psi	TD	34136	
Elongation	%	MD	130	ASTM D 882
	%	TD	120	
C.O.F	BB		=< 0,5	ASTM D 1894
Surface tension	dyne/cm	F	52	ASTM D 2578
Heat seal force @290° F	g/in. HS-HS (BB)		650	PLATINUM
Heat seal force @340° F	g/in. HS-Tray		650	PLATINUM

F: Front B: Back * 2,8 bar (420N) / 1 sn / 140 C

This film complies with the EC and FDA food contact regulations. Detailed documentation is available on your request.

All the information contained in this datasheet is supplied at the best of our knowledge and must not be construed as a guarantee. Since the circumstances and processes used in the application of our product are beyond our control, our guarantee remains within the limits of the generic conditions of supply of the product itself. Our Sales & Marketing Departments are available to supply upon request all the updated recommendations relevant to the best converting and processing techniques for the product. Also, different film thicknesses and properties are available upon request.