# THE PLATINUM PACKAGING GROUP

# PLATMachinery Horizontal Flow Wrapper

# **MODEL 150** (Servo Still In Development)



Performance Output Units wrapped and sealed at speeds Up to 120 To 250 Pks Per Minute (Depending On Film Type & Single or 2 Up Seal Heads)

#### Applications

fresh, frozen, & prepared foods produce consumer goods

### Technical Specifications

#### Performance Output

Up to 250 ppm —based on a 6" bag run in a 2-up configuration

#### Dimensions

Machine Size (Approx.)	
Length	151"
Width	41"
Height	65"

#### Infeed Conveyor

Length	94'
Feed Space	54'
Height above floor	37'

#### **Product Discharge**

Conveyor	24" Standard
	48" Optional

#### Weight

1200 lbs base machine

Utility Connection Electric 230V, 3PH, 60Hz Air HS250: 2CFM @ 80 PSI HS150: 2CFM @ 80 PSI extended end seal (crimp) [H250, H150M]

> bead seal [HS250, HS150M]

### **Packaging Specifications**

#### Maximum Package Size

(Not tolerated	simultaneously)
Length	4" – 16"
Width	1/2" – 9"
Height	2 <sup>5/8</sup> " Standard
	4" Optional

#### Wrapping Material

Max. Roll Diameter 13" Max. Roll Width 20" Standard 30" Optional

Fin Seal Assembly (length seal)First setPullingSecond setSealingThird setPulling / Fold over

End Crimper (cross seal) 1-up x 8" wide Standard 1-up x 10" & 12" wideOptional Film Types polyester polypropylene printed or clear film perforated film

### **Standard Features**

Touch screen monitor Program up to 15 products Available in both left-to-right and right-to-left product flow Powder coated frame Stainless steel covers Food contact approved conveyor Overload clutch on crimpers

### **Optional Features**


USDA-compliant infeed conveyor Relieved upper crimper shaft 2-up end crimper Roller rider conveyor Dual parent roll Extended infeed sections Dual pitch infeed conveyor Stainless steel frame & shafts Printer / code date interface Electric eye film registration No product – No bag No gap – No seal Air opening and closing heated fin wheels (requires compressed air, 1 CFM @ 80 PSI)

# THE PLATINUM PACKAGING GROUP

# **PLAT***Machinery* Horizontal Flow Wrapper

# MODEL 150 (Servo Still In Development)

Built to last, Wide range of product sizes, Easy changeover

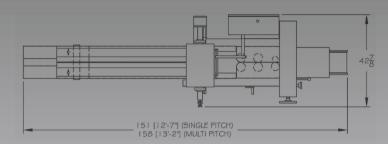

## **Overview**

PPG's exceptionally adaptable Series 150 is designed for easy operation. A cantilevered self-centering parent roll backstand is conveniently located above the adjustable or fixed former.

Unique to the Series 150 is a generous product size range including a wide film capacity backstand and end crimper which allows greater product size flexibility. Our heavy duty end crimper drive assures high performance end sealing and cut-off.

The Series 150 is easily customized to meet specific packaging needs and is available in right or left hand configurations.



H250 Horizontal Flow Wrapper

A 10" color touch screen allows pre-programming the product setup, making changeover a snap and requiring no tools for most sizes. Also available as a shrink wrapper. The shrink version requires compressed air (2 CFM @ 80PSI).

## **Quick Changeover** Simple machine control layout and adjustable former.

Standa	idard Features		Seal Style				
Model	Drive	PPM	Touch Screen	Crimp	Bead	Food Safe	Feed Space
H250	servo	250	•	•		٠	54"
HS250	servo	250	•		٠	•	54"

### **Optional Accessories**

Lazy Susan (rotary turn table) Adjustable side table Spare parts kit



Lazy Susan With Side Tables



Roll Up Or Attached Side Tables

THE PLATINUM PACKAGING GROUP tel: (562) 630-6700 • fax: (562) 630-6716 7627 Somerset Blvd., Paramount, CA 90723 sales@platinumpkggroup.com