


THE PLATINUM PACKAGING GROUP

PLAT*Machinery* Thermal Transfer Printer (TTO)

PPG series TTO

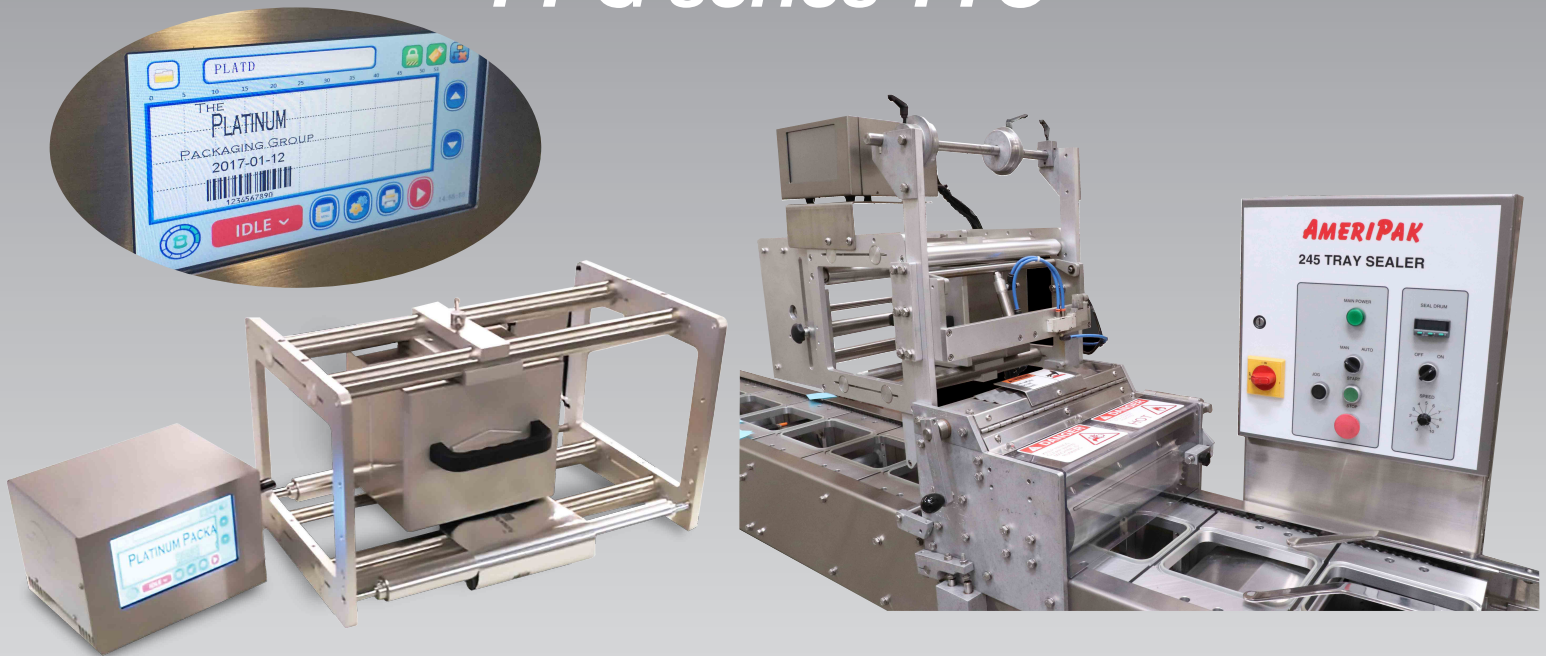

*DK-05 53mm Wide TTO Printer with cables and air regulator. Includes printer design software and basic spares.
Print area: 53mmW x 100mmL Continuous Mode 53mmW x 70mmL Intermittent Mode.*

Encoder Kit for continuous printing capability for DK series TTO printers.

TTO Printer Mounting Bracket for Continuous motion operation; includes precision ground mandrel roller.

Mounting bracket for Intermittent . Continues Printer operation - Specify width when ordering.



*Print Area: 53mm Width x 100mm Length Continuous Mode
Print Area: 53mm Width x 70mm Length Intermittent Mode*

DIAGRAM COMPONENTS



PRINTED SAMPLES



| | D03 Intermittent | D03 Continuous | D05 Intermittent | D05 Continuous |
|----------------------|-------------------------------------|-------------------|-----------------------|-------------------|
| Print Head | 32mm, 300DPI, Kyocera | | 53mm, 300DPI, Kyocera | |
| Print Area | 32mm*60mm(W*L) | 32mm*100mm(W*L) | 53mm*70mm | 53mm*100mm |
| Max Length of Ribbon | 600m | | | |
| Width of Ribbon | 22mm-33mm | | 25mm-55mm | |
| Print Speed | D03: max 40 meters/minute | | D05: max 36 mts/min | |
| Interface | USB | | | |
| Power Supply | AC 110V-220V+/- 10V, 50/60HZ, 150W | | | |
| Air Supply | 6 Bar/90Psi(Max), Dry, No Pollution | | | |

Systems are provided ready to mount and use, includes design software, air regulator, power an connection cables.

Ribbon is easily replaced by simply sliding the carriage out.

The printers are designed for intermittent and continuous mode operation, but mounting bracket must be selected to match the intended mode. For continuous mode, encoder P/N DK5040K-B55 must be purchased separately.

THE PLATINUM PACKAGING GROUP

tel: (562) 630-6700 • fax: 6716
7627 Somerset Blvd., Paramount, CA 90723

TO PLACE ORDERS:
sales@platinumpkggroup.com

FOR MORE INFORMATION:
www.platinumpkggroup.com

QUESTIONS:
information@platinumpkggroup.com