

S140 MODEL

HORIZONTAL SHRINK WRAPPER



A proven performer, **Platinum's S140 Model** offers high speed shrink packaging of a wide range of products from trading cards to construction paper, candles to compact discs. A variety of shrink films can be sealed on the S140 Model including polyolefins as well as PVC's. Equipped with a column mounted self-centering parent roll, the S140 Model offers a simplified flow of wrapping film to the product former.


Wrapping speed is adjusted simply by rotating a convenient dial on the operating panel. An oversized variable speed motor is standard, providing sufficient power to drive infeed product feeders. Changing package length is push button easy, thanks to an electronically controlled fin wheel drive. Electric eye film registration is available as an option for those customers wishing to use register print shrink film.

Fin wheels pull the film and product through the wrapper while making a continuous lengthwise bead seal beneath the product. Trimmed film is diverted from the fin seal area to a driven scrap wind-up system.


The S140 Model includes Platinum's unique EZSET crimper phasing adjustment which allows the operator to position the end crimper between products during set up and while running without the need to remove product from the film tube. This feature along with our adjustable former makes size changes quick and saves the cost of multiple product formers required on many competitive machines.

Small machine size, large product size range, good speed, low cost, strong construction, U.S made and with plenty of driving power, that's the Platinum S140 Model.

Platinum S140 Model Horizontal Shrink Wrapper

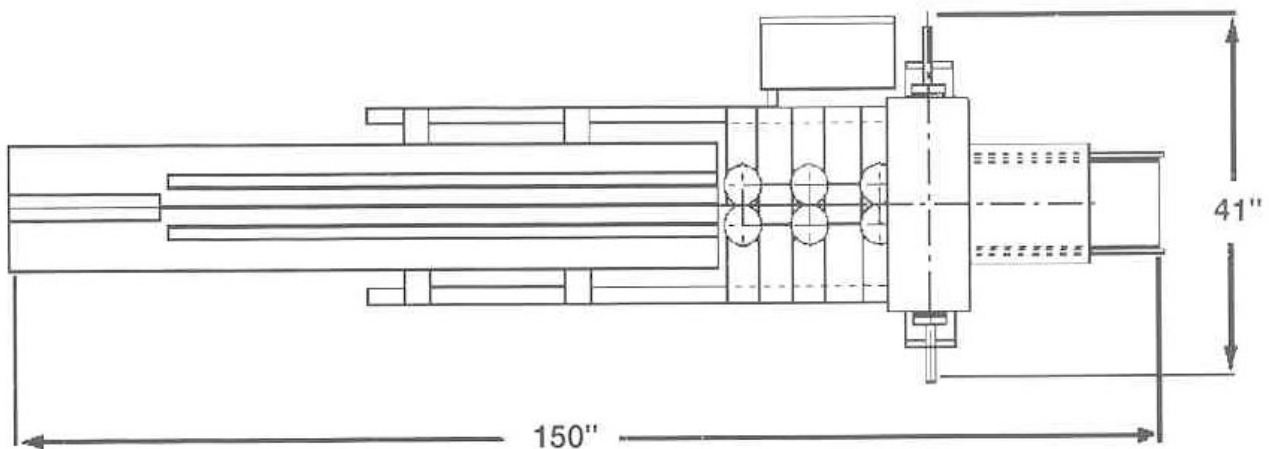

SPECIFICATIONS

- **Machine Size (Approximate)**
Length – 150”
Width – 41”
Height – 65”
- **Infeed Conveyor**
Length – 102”
Feed Space – 60”
Height Above Floor – 36”
- **Wrapping Material**
Maximum Parent Roll Diameter – 13”
Maximum Roll Width – 20”
1 Parent Roll
- **Fin Seal Assembly**
First Set – Pulling
Second Set – Sealing
Third Set – Pulling
- **End Sealer (Cross Seal)**
1 Up x 10” Wide
- **Product Discharge**
Conveyor, 24” Long
- **Three Heat Controllers**
- **Product Flow**
Left to Right, Facing the Control Panel
- **Polyurethane Finish, STD**
- **Maximum Package Size**
(Cannot Be Tolerated Simultaneously)
Length – 16”
Width – 9”
Height – 4”

- **Electrical**
2 HP Variable Speed Motor 230V, 3PH, 60H
230V, 3PH, 60H
- **Weight**
1800 Lbs.
- **OPTIONAL EQUIPMENT**
Expanded Size Range
Extended Infeeds
Expanded Spare Parts Kit
Double Parent Roll
Power Feed Roll