

3500 MODEL HORIZONTAL WRAPPER

- *For High Speed Applications*
 - *Rugged Servo Drive*
 - *Dependable*
 - *Precise Size Control*




Designed for high speed, multi-shift operations, the 3500 Model horizontal wrapper is the ideal choice where performance and reliability are required. Constructed with a heavy duty modular frame, this machine is equally at home as a basic wrapper or as a high speed wrapper with fully automatic product feeders operating at very high speeds. The wrapper accommodates a wide range of heat sealable wrapping materials, from standard single layer films to multiple layer laminations.

Three sets of tiltable fin wheels to accurately control the film for high speed wrapping of your smallest to largest products are standard on the 3500 Model. A control panel with graphic

display allows convenient monitoring and control of the wrapper

Unique EZSET control of crimper phasing can be set with the machine running, saving valuable set-up time and product. All the controls for changing from one sized product to another can be adjusted by hand, no tools required. Most adjustments have been placed on the front of the machine for quick size changes. These are just some of the many features Platinum has developed for the 3500 Model that make set-up and operation easy. Contact your Platinum agent to learn more about this wrapper.

Platinum 3500 Model Horizontal Wrapper

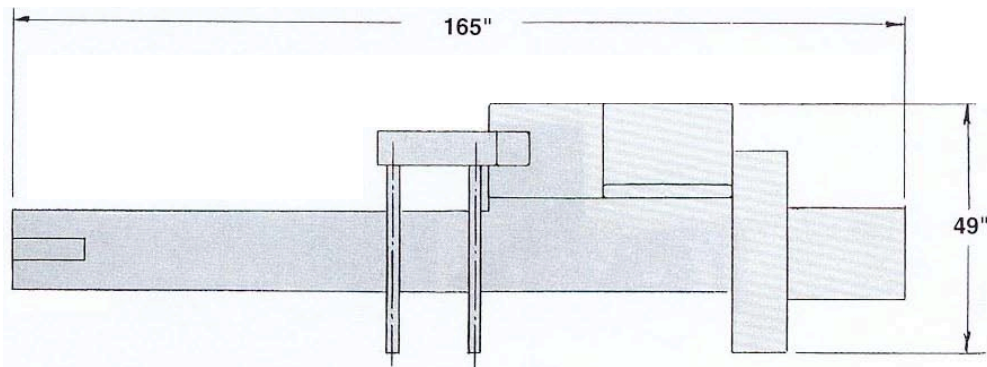


SPECIFICATIONS

- **Machine Size**
Length – 165"
Width – 49"
Height – 69"
- **Infeed Conveyor**
Length – 104"
Width – 16"
Height – 37"
- **Wrapping Material**
Maximum Parent Roll Diameter – 13"
Roll Width – 24"
Double Parent Roll, Standard
Electric Eye Film Registration, Standard
- **Fin Seal Assembly**
First Set – Pulling
Second Set – Sealing
Third Set – Pulling
- **Fin Drive Servo Controlled**
- **End Crimper**
2-up, diameter to suit application
- **Discharge Conveyor Belt**
Length – 23"
Width – 9.5"
- **Product Flow (Facing the Control Panel)**
Left to Right, Standard
Right to Left, Optional
- **Epoxy Finish Standard**
Stainless Steel Optional
- **Package Size Range (Approx. Range)**
(cannot be tolerated simultaneously)
Length – 3" to 17"
Width – ½" to 9"
Height – up to 4"
- **Electrical**
3 HP AC drive motor
230V, 3PH, 60H
- **Three Digital Heat Controllers**
- **Weight**
2500 lbs.



OPTIONAL EQUIPMENT

- Casters
- Code Dater
- Longer Infeed
- Product Feeders
- Gusset Attachment
- Special Seal Patterns



Three sets of individually tiltable fin wheels mean easily adjusted, precise product wraps